


TenPoint Crossbow Technologies™

GT MAG™ ASSEMBLY INSTRUCTIONS

To prevent injury to yourself or others, or damage to your crossbow, read this manual along with all other operating and safety instructions included in your crossbow package before assembling, loading or using the crossbow.

THIS MANUAL COVERS:

GT MAG™

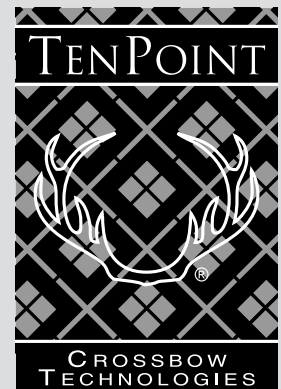


...the mark of perfection™

TenPoint Crossbow Technologies®
1325 Waterloo Road, Mogadore, OH 44260-9608
330.628.9245 | www.tenpointcrossbows.com

GT MAG™ ASSEMBLY

The GT Mag is easy to assemble. Basically, you only have to bolt the bow assembly to the barrel assembly, install the quiver bracket (if you are going to attach the quiver to the bow) and you are ready to shoot. Once assembled correctly, your crossbow is pre-sighted for 20-yards.

Lay out the contents of your crossbow box in front of you. Be certain the box contains all of the following items before beginning assembly (photo 1):

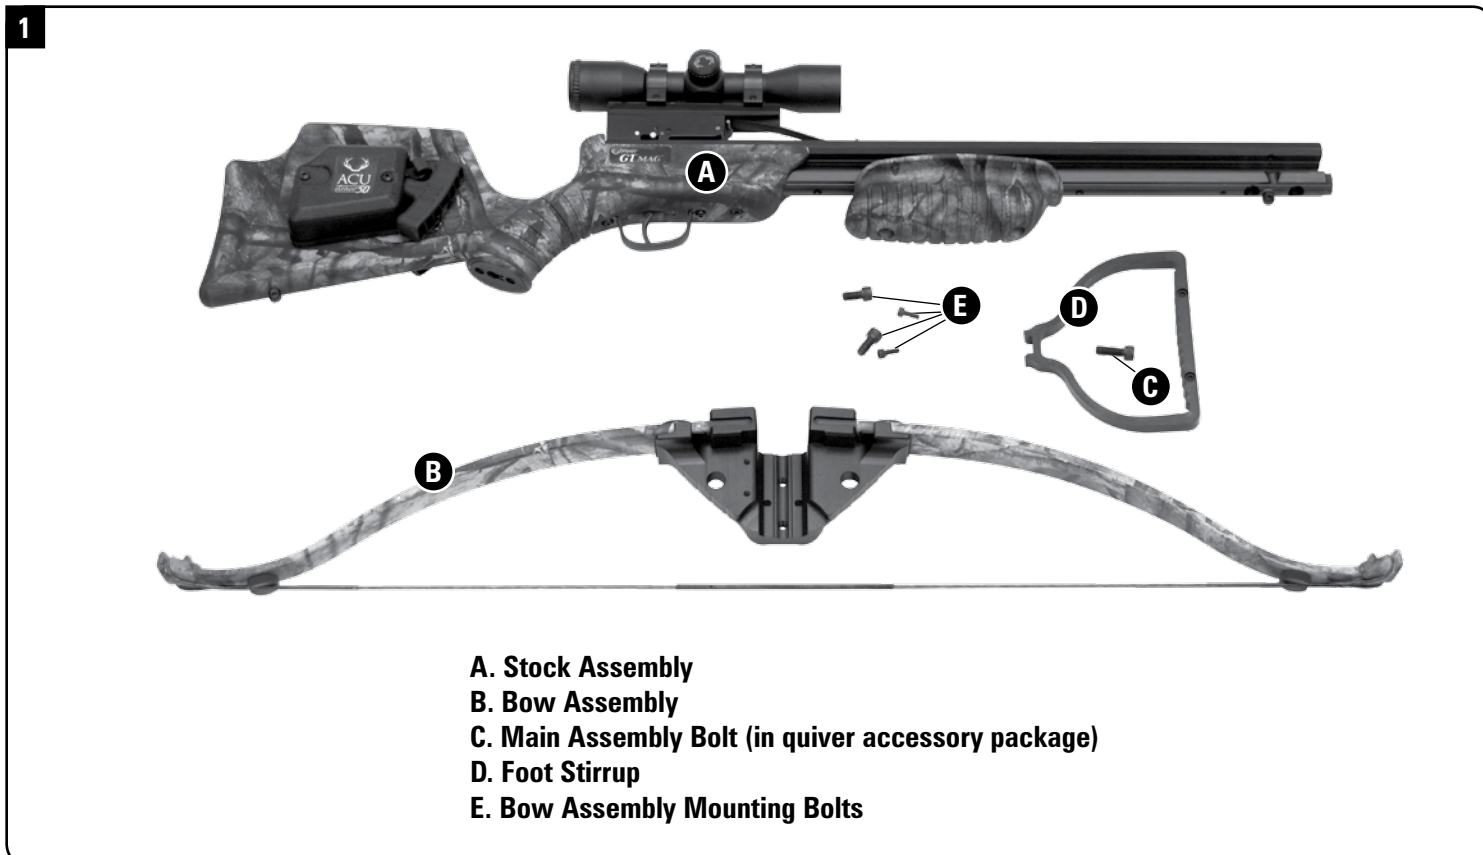


- One (1) complete stock assembly with fore-grip (located in the “short” position)
- One (1) complete bow assembly
- One (1) large clear plastic bag containing paperwork (including a warranty card) and one (1) other sealed plastic bag containing 4 bow assembly mounting bolts (2 large and 2 small), Allen wrenches and a sample tube of oil.


ASSEMBLY STEPS

Attach the bow assembly to the stock assembly as follows:

- With the bowstring on top of the barrel’s flight deck, slide the bow assembly (riser) between the top and bottom barrel until the four holes in the bottom of the riser are in the proper position. Align the two bolt alignment barrel notches (left and right side) and the two large holes on the bottom of the barrel with the four holes in the bottom of the riser (photo 2).

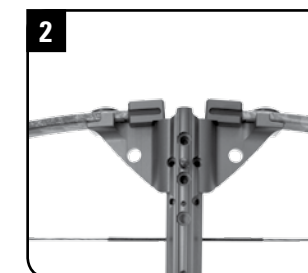


Bow assembly properly aligned between the top and bottom UL TriLoc barrels.



Insert the two smaller side alignment bolts before inserting the two larger bow assembly bolts.

- Insert the **two small assembly bolts** into the bolt alignment notches on the right and left of the barrel (these bolts attach through the bottom of the riser and the top of the barrel) (photos 3 & 4).

Note: Failing to install the small bolts in the side alignment notches will create a “launch-ramp” effect (producing an excessively high shot).



Squeeze the top and bottom of the barrel with your free hand when tightening the two smaller side alignment bolts.



Continue to squeeze the top and bottom of the barrel with your free hand when tightening the two larger bow assembly bolts.


- Insert the **two large bow assembly bolts** through the holes in the bottom of the UL TriLoc barrel that align with the riser (see photo 5).

Note: Squeezing the top and bottom of the barrel with your free hand when tightening all of the assembly bolts will help avoid thread stripping due to bolt misalignment.

- After tightening the two small and two large assembly bolts, try tightening all four of them again.
- If you choose to move the fore-grip to the long position (a matter of personal preference), remove the two fore-grip screws, align to desired position, re-insert them and tighten securely (photos 6 & 7).
- Attach the foot stirrup directly to the bottom section of the UL TriLoc barrel using the shorter main assembly bolt located in the quiver accessory package. Make sure the “valley” in the stirrup’s foot-pad points down so that it does not block the arrow’s flight path (photo 8).



Fore-grip in “short” position.

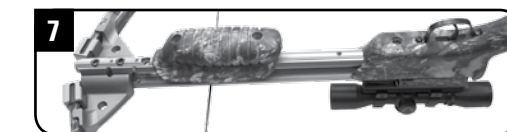

Fore-grip in “long” position.

Note: If you will be mounting the HX Instant Detach Quiver, follow the directions in the Quiver Mounting section on page 3.

- You are now ready to test-fire your crossbow and fine-tune your sights (**See appropriate Cocking, Loading & Sighting sections in the general manual**).



Attach the foot stirrup directly to the bottom section of the UL TriLoc barrel. See page 3 if mounting the HX Instant Detach Quiver.


GT MAG™ QUIVER MOUNTING

Your GT Mag quiver mounting kit is easy to install.

The quiver mounting kit contains the following parts (photo 1):

- Quick disconnect (female) attachment with lever (1)
- Phillips pan-head machine screws (2)
- Quiver mounting bracket (1)
- HX Instant Detach Quiver with quick disconnect (male) attachment (1)
- 5/8-inch socket-head cap screw foot stirrup bolt (use when not mounting quiver on bow) (1)
- 7/8-inch socket-head cap screw foot stirrup bolt (use when mounting quiver on bow) (1)


1. Attach the quick disconnect (female) attachment to the quiver mounting bracket using the two Phillips pan-head machine screws provided.
2. With the crossbow positioned bottom side up, mount the quiver bracket assembly between the 7/8-inch foot stirrup bolt and the foot stirrup (photo 2).
3. Insert the HX Instant Detach Quiver, with male attachment, into the quick disconnect (female) attachment and lock in place with the lever (photo 3).

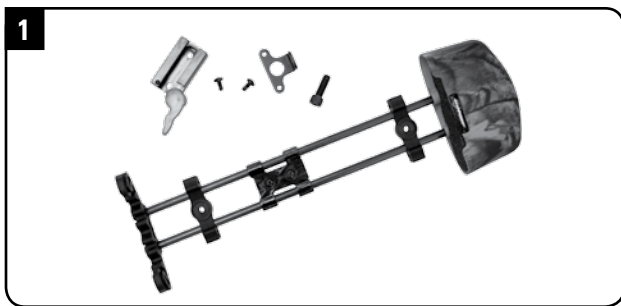


6 Point Series Quiver Mounting Kit



Quiver Mounted to Bow

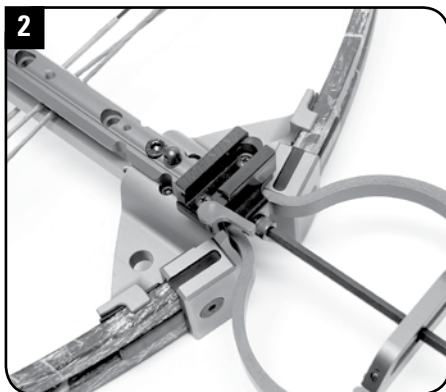

Mount the quiver bracket assembly between the 7/8-inch foot stirrup bolt and the foot stirrup.

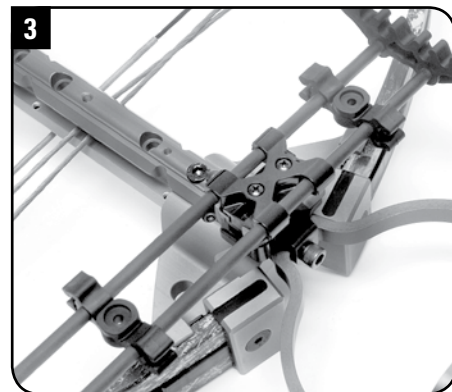

Insert the HX Instant Detach Quiver into place and lock in place with the lever.