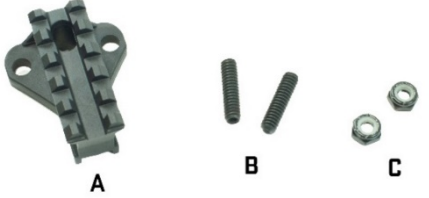



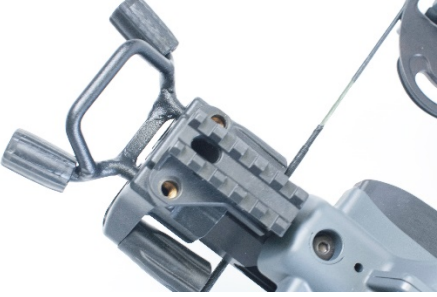

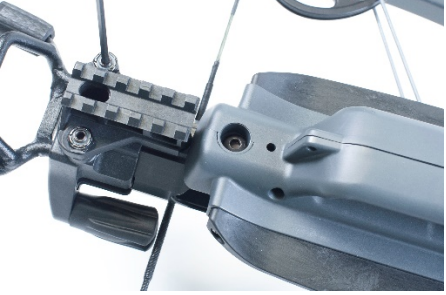


## Short Picatinny Rail Instructions (HCA-2843)

<p><b>1. Layout parts (photo 1):</b></p> <ul style="list-style-type: none"><li>A. ONE (1) Front picatinny rail</li><li>B. TWO (2) 1-inch setscrews</li><li>C. TWO (2) ¼-20 thin locknuts</li></ul>	 <p style="text-align: center;"><b>Photo 1</b></p>	
<p><b>2. Install the front picatinny rail.</b></p> <p>a. Remove the two (2) foot stirrup setscrews (photo 2a &amp; 2b).</p>	 <p style="text-align: center;"><b>Photo 2a</b></p>	 <p style="text-align: center;"><b>Photo 2b</b></p>
<p>b. Position the <b>front picatinny rail</b> over the two holes you just removed the setscrews from. The mounting bracket holes should face forward toward the foot stirrup (see photo 3a &amp; 3b).</p>	 <p style="text-align: center;"><b>Photo 3a</b></p>	 <p style="text-align: center;"><b>Photo 3b</b></p>
<p>c. Insert and tighten the two 1-inch setscrews (with Nyloc nuts) into the same holes you removed the setscrews from. Then, using a 7/16-inch open-ended wrench, tighten the two Nyloc nuts until the quiver mounting bracket is secure (photo 4a &amp; 4b). Do not over-tighten.</p>	 <p style="text-align: center;"><b>Photo 4a</b></p>	 <p style="text-align: center;"><b>Photo 4b</b></p>